
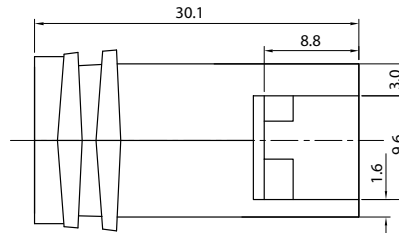

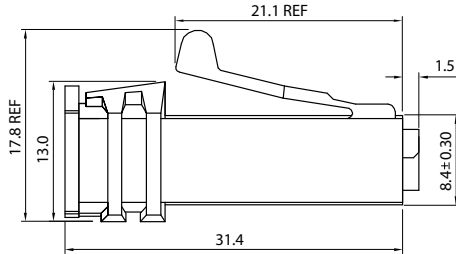


REVISIONS		
REV	DESCRIPTION	DATE
A	RELEASE FOR QUOTE	10/2006



KEY POSITION 1

Note:
1. All materials conform to EN Directive 2002/95/EC for RoHS compliance.
Electrical Characteristics:
Contact Resistance: Terminal 25mΩ Max. and ground terminal 8mΩ Max.
Insulation Resistance: 100MΩ Min. at 500V DC.
Dielectric Strength: 750V AC/1 minute.
Insertion Force: 5.9kgf Max.
Withdrawal Force: 1.59 ~ 5.9 kgf
Latch Retention: 9.07 kgf Min.

UNLESS OTHERWISE SPEC'D DIM. ARE IN MILLIMETER. TOL. ARE: FRACTION DECIMAL ANGULAR ± ± ± .005 1/2"		THIRD ANGLE PROJECTION		CONQUEST TECHNOLOGY LIMITED	
MATERIAL		APPROVALS		DATE	
FINISH		DRAWN A. PEREZ		10/30/06	
DO NOT SCALE DRAWING		SCALE: N/A		SHEET 1 OF 1	
8 Pin PoweredUSB, 2x4, 12V, 6.5mm Cable, Black - RoHS		DWG. NO. 371215		REV A	