

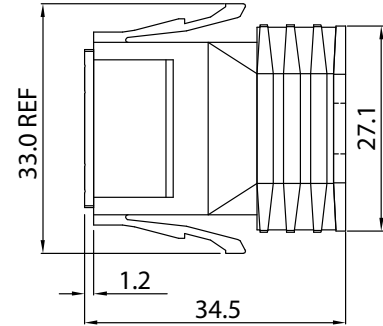




REVISIONS		
REV	DESCRIPTION	DATE
A	RELEASE FOR QUOTE	11/2006



Note:
1. All materials conform to EN Directive 2002/95/EC for RoHS compliance.
Electrical Characteristics:
Contact Resistance: Terminal 25m Max. and ground terminal 8m Max.
Insulation Resistance: 100M Min. at 500V DC.
Dielectric Strength: 750V AC/1 minute.
Insertion Force: 5.9kgf Max.
Withdrawal Force: 1.59 ~ 5.9 kgf
Latch Retention: 0.07 kgf Min.

UNLESS OTHERWISE SPEC'D DIM. ARE IN MILLIMETER. TOL. ARE: FRACTION DECIMAL ANGULAR ± ± ± .005 1/2°		RoHS DIRECTIVE		THIRD ANGLE PROJECTION 		CONQUEST TECHNOLOGY LIMITED	
MATERIAL		APPROVALS		DATE		8 PIN, PoweredUSB, 1X8 LNL, 6.5mm Cable, Black - RoHS	
FINISH		DRAWN JOSE		11/06/06		SIZE A	DWG. NO. 371221
DO NOT SCALE DRAWING						SCALE: N/A	REV A
						SHEET	1 OF 1