




REVISIONS		
REV	DESCRIPTION	DATE
A	RELEASE FOR QUOTE	12/2006

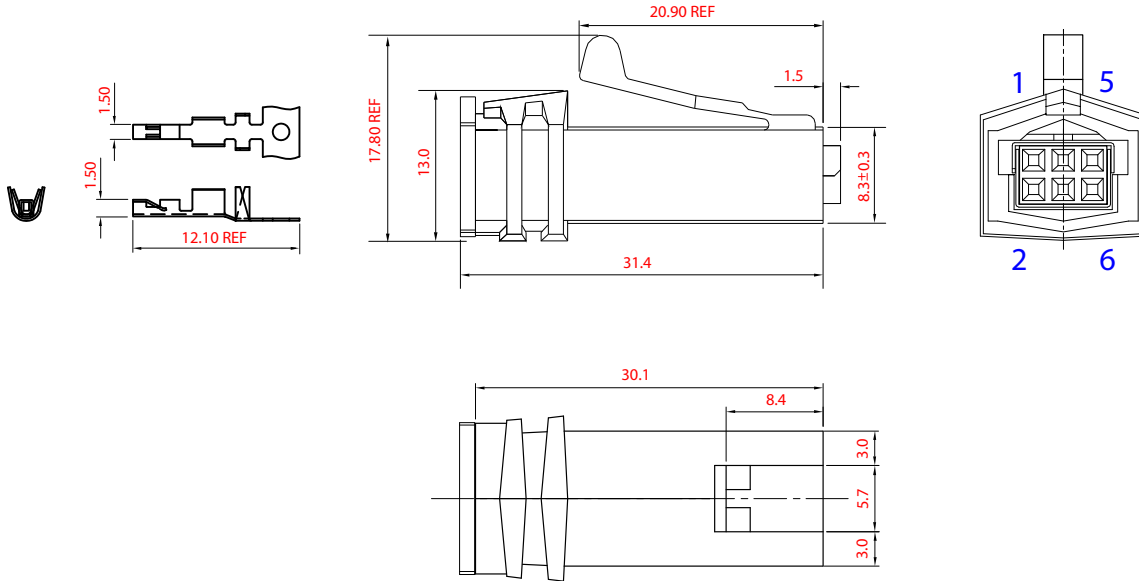

**Note:**  
 1. All materials conform to EN Directive 2002/95/EC for RoHS compliance.  
 Electrical Characteristics:  
 Contact Resistance: Terminal 25m Max. and ground terminal 8m Max.  
 Insulation Resistance: 100M Min. at 500V DC.  
 Dielectric Strength: 750V AC/1 minute.  
 Insertion Force: 5.9kgf Max.  
 Withdrawal Force: 1.59 ~ 5.9 kgf  
 Latch Retention: 9.07 kgf Min.

UNLESS OTHERWISE SPEC'D DIM. ARE IN MILLIMETER. TOL. ARE: FRACTION DECIMAL ANGULAR ± .008 ± .005 ± .008 1/2°								CONQUEST TECHNOLOGY LIMITED		
MATERIAL		APPROVALS		DATE		6 Pin Powered USB, 2x3 Plug Connector w/Std. Latch, 6.1mm Exit Hole, Pebble Grey - RoHS				
FINISH		DRAWN AuYeung		12/20/06		SIZE A		DWG. NO. 371251		REV A
DO NOT SCALE DRAWING						SCALE: N/A		SHEET 1 OF 1		